

IntAct BP 12V 50Ah AGM akumuliatorius



Prekės ženklas: INTACT

Sandelyje: 6

Svoris: 14.50kg

Matmenys: 197.00mm x 165.00mm x 170.00mm

Kaina: 129.00€

Aprašymas

[intAct BP12-50 duomenų lapas](#)

- Informacija
- Gamintojas: INTACT (Vokietija)
- Talpa: 50Ah
- Įtampa: 12V
- Akumuliatoriaus tipas: VRLA (AGM)
- Gnybtų padėtis: -- +
- Korpuso dydis: SLA 12-40 (~198x165x170)
- Ilgis (mm): 197
- Plotis (mm): 165
- Aukštis (mm): 170
- Svoris (kg): 14.5
- Garantija: 6 mėnesiai



BP12-50(12V50AH)




PHYSICAL SPECIFICATION

Nominal Voltage		12V
Nominal Capacity (10HR)		50AH
Dimension	Length	197±2mm (7.76 inches)
	Width	165±2mm (6.50 inches)
	Container Height	170±2mm (6.69 inches)
	Total Height (with Cover)	170±2mm (6.69 inches)
Weight		Approx 14.5kg (31.97lbs)
Standard Terminal		Threaded Insert 6mm STUD

Electrical Specification

Rated Capacity	20 hour rate (2.50A)	50.0AH	Constant Voltage Charge	Cycle	Initial Charging Current less than 15.0A Voltage 14.4V~15.0V at 25°C (77°F) Temp. Coefficient -30mV/°C
	10 hour rate (4.80A)	48.0AH			
	5 hour rate (8.29A)	41.4AH			
	3 hour rate (12.5A)	37.5AH			
	1 hour rate (29.5A)	29.5AH			
Capacity affected by Temperature	40°C (104°F)	103%	Standby		No limit on Initial Charging Current Voltage 13.5V~13.8V at 25°C(77°F) Temp. Coefficient -20mV/°C
	25°C (77°F)	100%			
	0°C (32°F)	86%			


Dimensions (mm)




Standard Terminal (mm)

Threaded Insert 6mm STUD


T6



Discharging Current & Discharge Duration Time

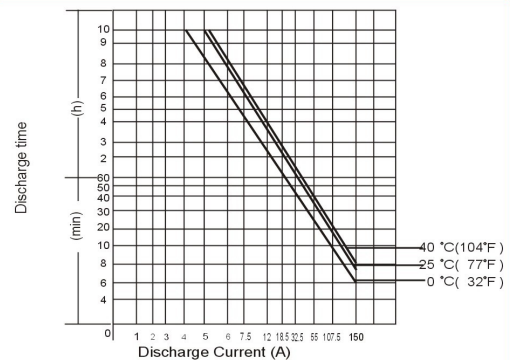

Discharge Characteristics (25°C, 77°F)

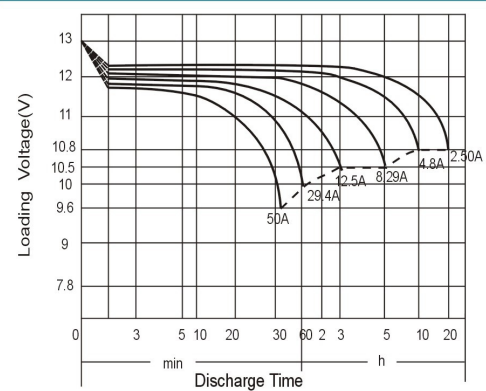

Constant Current (Amp) and Constant Power (Watt) Discharge Table (25° C, 77° F)

Time(minute) Final voltage	10	15	20	30	45	60	120	180	240	300	360	480	600	1200
Amp/Watt/Cell	1.30	1.30	1.30	1.60	1.60	1.67	1.70	1.75	1.75	1.75	1.75	1.80	1.80	1.80
A	117.4	89.26	70.46	52.05	37.21	29.40	17.0	12.5	10.2	8.29	7.32	5.735	4.8	2.50
W	199.6	156.1	126.4	94.90	69.02	96.67	32.63	24.2	19.7	16.0	14.3	11.32	9.543	4.964

